


R2351



TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

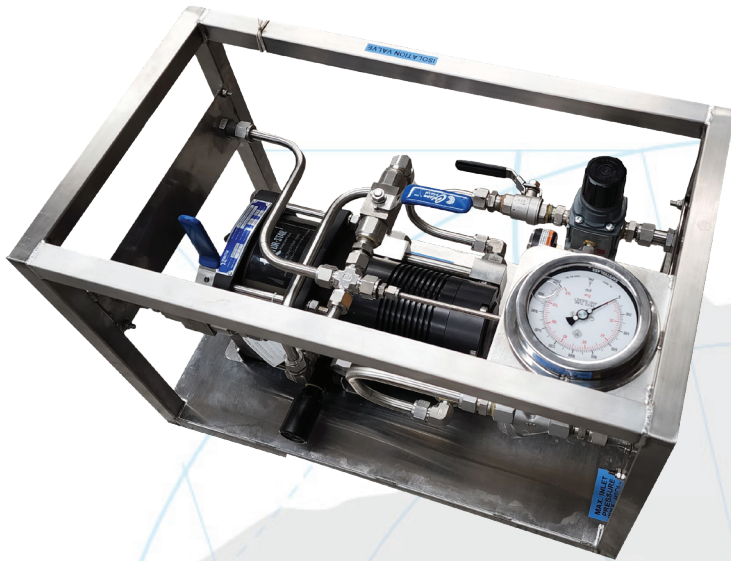


Hydrostatic Test Unit

Trident Australia Hydrostatic Pressure Test Unit, including Haskel Hydraulic air operated liquid pump, calibrated pressure gauge & air regulator.

Air powered pump have been built into 316 stainless steel frame and fitted with all the controls required for pressure testing. Air regulator to control test pressure and with isolation and vent valves for testing.

We ensure highest quality performance from our Hydrostatic Test Unit by having them calibrated yearly in our NATA accredited laboratory and serviced after every rental job.

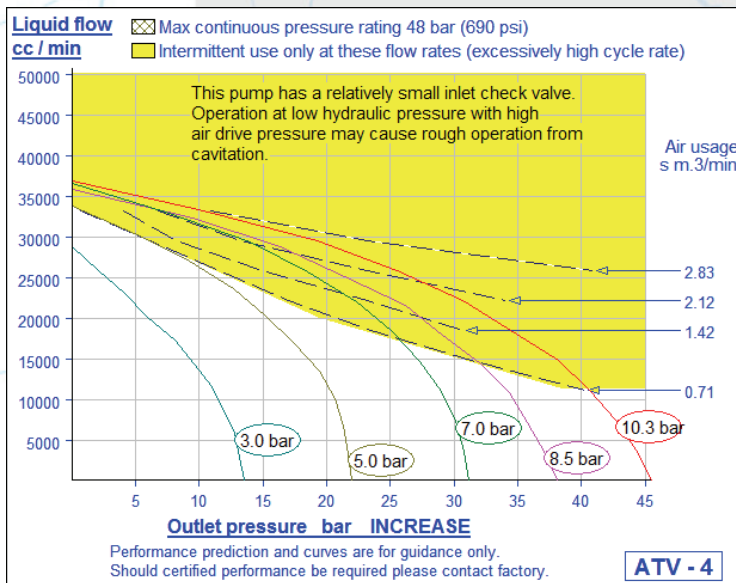

Equipment Specifications

- Haskel Pump Number: ATV-4
- Liquid Connections: 1/2" NPT Female
- Air Connection: 1/2" BSPT Female
- Working Pressure: 0-690 psi
- Weight: 20 kgs

All of Trident Australia's rental equipment is checked and serviced before every rental job to ensure you get the best product and experience every time

WHAT YOU NEED.
WHEN YOU NEED IT.



15 Magnet Road,
Canning Vale WA 6155 | Australia
+61 8 9456 1300 phone
www.tridentaustralia.com.au