



26-1100 SERIES

Regulators - Pressure Reducing

D26110539X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

Stainless Steel Body (0.25" Orifice): 10,000 psig / 690 bar

Stainless Steel Body (0.375" Orifice): 6000 psig / 414 bar

Aluminum Body: 6000 psig / 414 bar

Brass Body: 6000 psig / 414 bar

Outlet Pressure Ranges

To maximum inlet

Design Proof Pressure

150% maximum rated

Leakage

Bubble-tight

Operating Temperature

-40°F to 165°F / -40°C to 74°C

Flow Capacity

0.25" Orifice: $C_v = 0.46$

0.375" Orifice: $C_v = 1.30$



TESCOM 26-1100 Series is a dome load, high flow pressure reducing regulator.

MEDIA CONTACT MATERIALS

Body

303 Stainless Steel, 316 Stainless Steel, Aluminum, or Brass

Diaphragm

Nitrile, Buna-N

O-Rings

Nitrile, Buna-N

Back-up Rings

PTFE

Seat

PCTFE

Retaining Ring

15-7 Stainless steel

Valve Cap

17-4 PH Stainless Steel

Remaining Parts

300 Series Stainless Steel

Applications

- Pneumatic test consoles
- R&D laboratories

Features and Benefits

- Constant outlet pressures with variable inlet pressures
- Balanced main valve to reduce seat load which insures longer seat life
- Wide flow range capability
- Low droop; low lock-up
- Rapid response time
- Mounts in any position
- Two orifice sizes are available: 0.25" and 0.375" diameter

OTHER

Cleaning

CGA 4.1 and ASTM G93


Weight (without gauges)

Stainless Steel: 10 lbs / 4.5 kg

Aluminum: 4 lbs / 1.8 kg

26-1100 SERIES



26-1100 Series Regulator Drawing

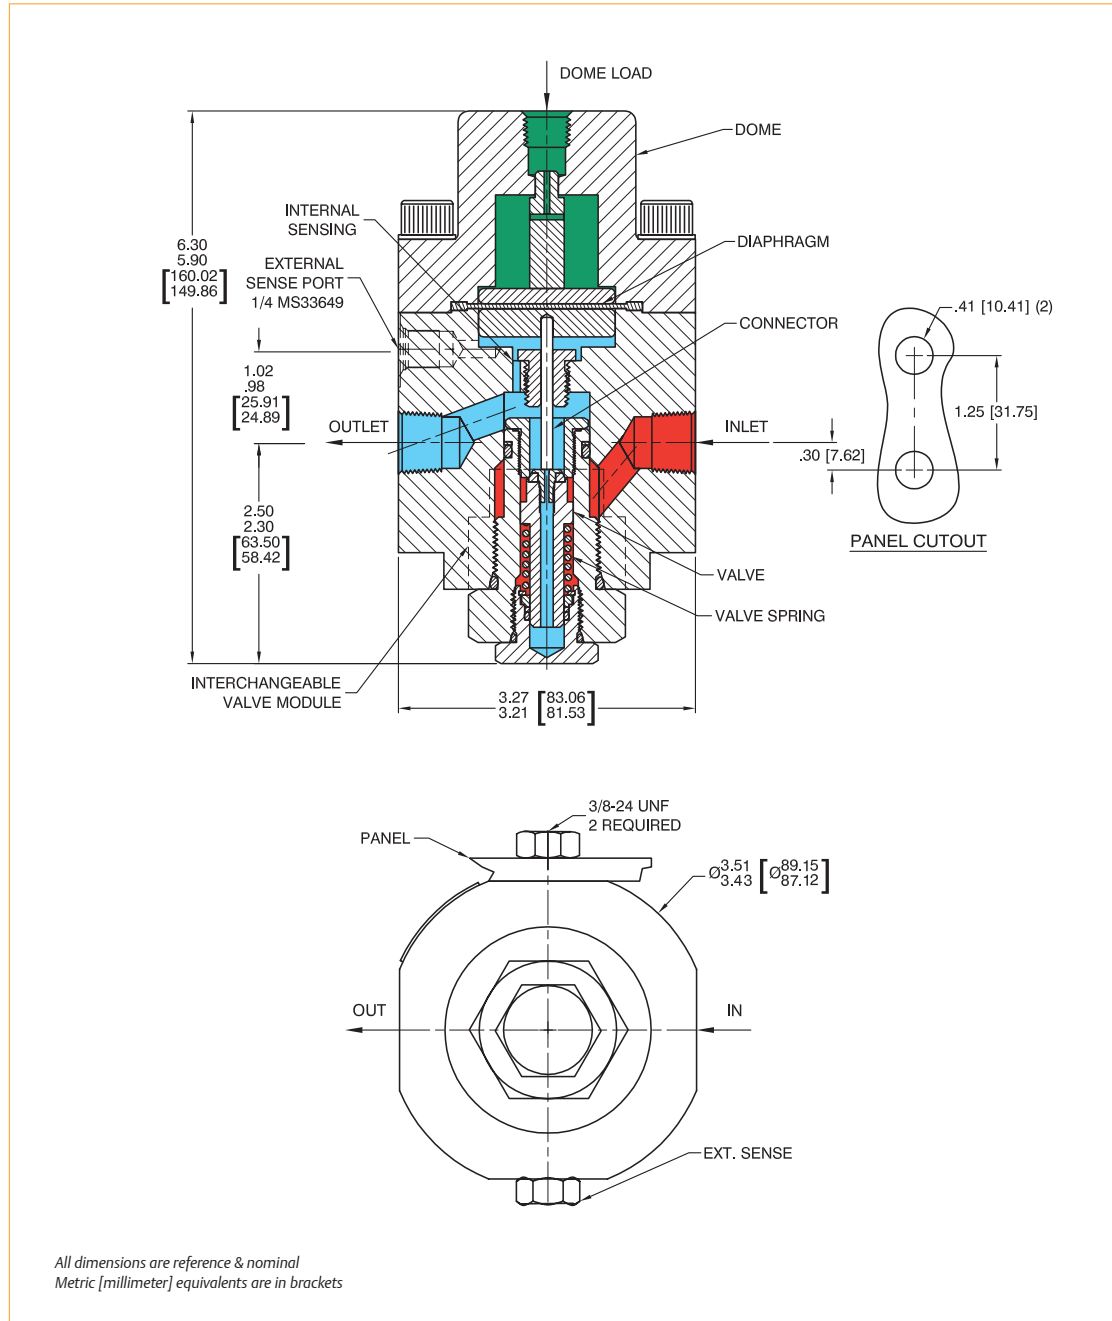

26-1100 SERIES

26-1100 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

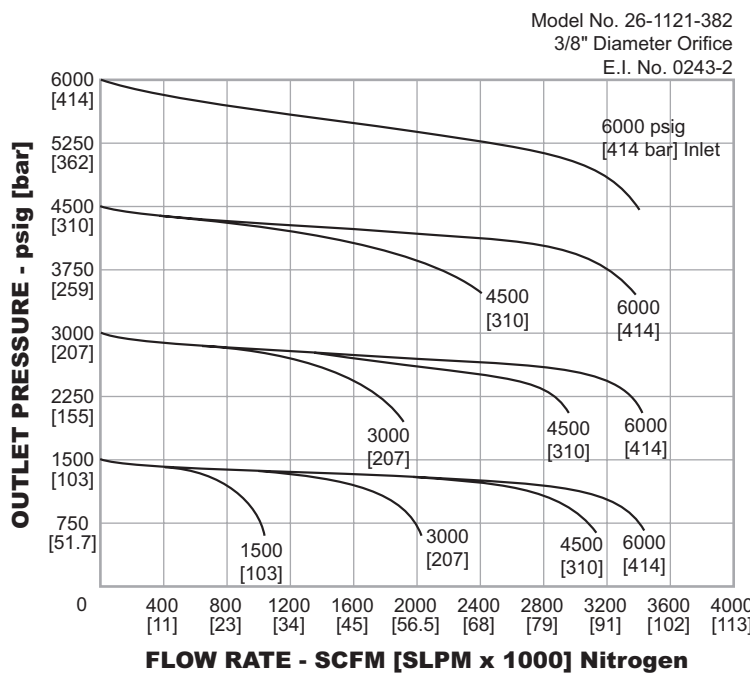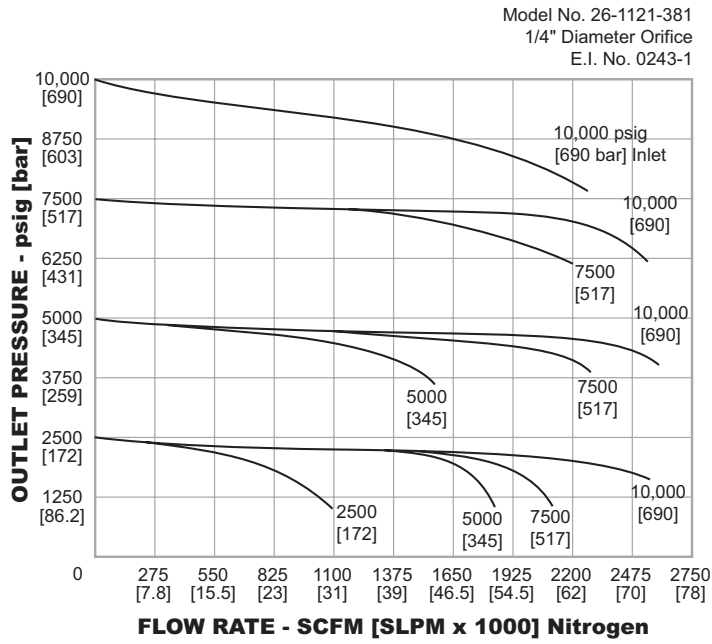

26-1100 SERIES

26-1100 Series Regulator Part Number Selector

Repair Kits, Accessories & Modifications may be available for this product. Please contact TESCOM for more information.

Example for selecting a part number:

BASIC SERIES	BODY MATERIAL	LOADING METHOD	INLET AND OUTLET PORT TYPE	DOME PORT	INLET AND OUTLET PORT SIZE	INNER VALVE SIZE
26-11	2	1	-	3	8	1
26-11	1 – Brass 2 – 303 Stainless Steel 3 – Aluminum 2024-T351 6 – 316 Stainless Steel	1 – Externally loaded	1 – SAE 2 – NPTF 3 – MS33649	1/4" MS33649 1/4" NPTF 1/4" MS33649	6 – 3/8" 8 – 1/2"	1 – 0.25" Orifice 2 – 0.375" Orifice