



26-2300 SERIES

Regulators - Relief / Backpressure

D26230694X012

Specifications

For other materials or modifications, please consult TESCOM.

OPERATING PARAMETERS

Pressure rating per criteria of ANSI/ASME B31.3

Maximum Inlet Pressure

0-50, 0-150, 0-250 psig / 0-3.4, 0-10.3, 0-17.2 bar

Design Proof Pressure

150% maximum rated

Leakage

Bubble-tight

Operating Temperature¹

-40°F to 165°F / -40°C to 74°C

Flow Capacity

$C_v = 0.60$

Maximum Operating Torque

25 in-lbs / 2.8 N•m

¹. For extended temperatures from -40°F to 400°F / -40°C to 204°C, please consult TESCOM.

MEDIA CONTACT MATERIALS

Body

303 Stainless Steel, 316 Stainless Steel, or Aluminum 2024-T351

Diaphragm

Nitrile, Buna-N

Main Valve Seat

PTFE

O-Rings

Nitrile, Buna-N

Seals

PTFE

Remaining Parts

300 Series Stainless Steel

OTHER

Cleaning

CGA 4.1 and ASTM G93

Weight

Stainless Model: 2.25 lbs / 1.0 kg

Aluminum Model: 1.25 lbs / 0.6 kg

Teflon® is a registered trademark of E.I. du Pont de Nemours and Company.



TESCOM 26-2300 Series is a highly accurate, diaphragm sensed backpressure regulator. It controls pressures up to 500 psig / 34.5 bar and offers many C_v s from 0.02 up to 1.0. Air and dome loaded versions are available for remote operation or for use with the TESCOM ER5000 Electropneumatic Controller for automation.

Applications


- Hydraulic or pneumatic testing
- Calibration
- Pump discharge pressure control

Features and Benefits

- Crack to reseal - 2% of set pressure
- Easily adjusted, low torque handknob control
- Bubble-tight shutoff at all reseal pressures
- Four flow capacities available:
 $C_v = 0.60$ standard
 $C_v = 0.06, 0.12, 1.0$ optional
- Spring, dome, and air loaded models are available
- Panel mounting is standard
- Compatible with TESCOM ER5000 Electropneumatic Controller

26-2300 SERIES

26-2300 Series Regulator Drawings


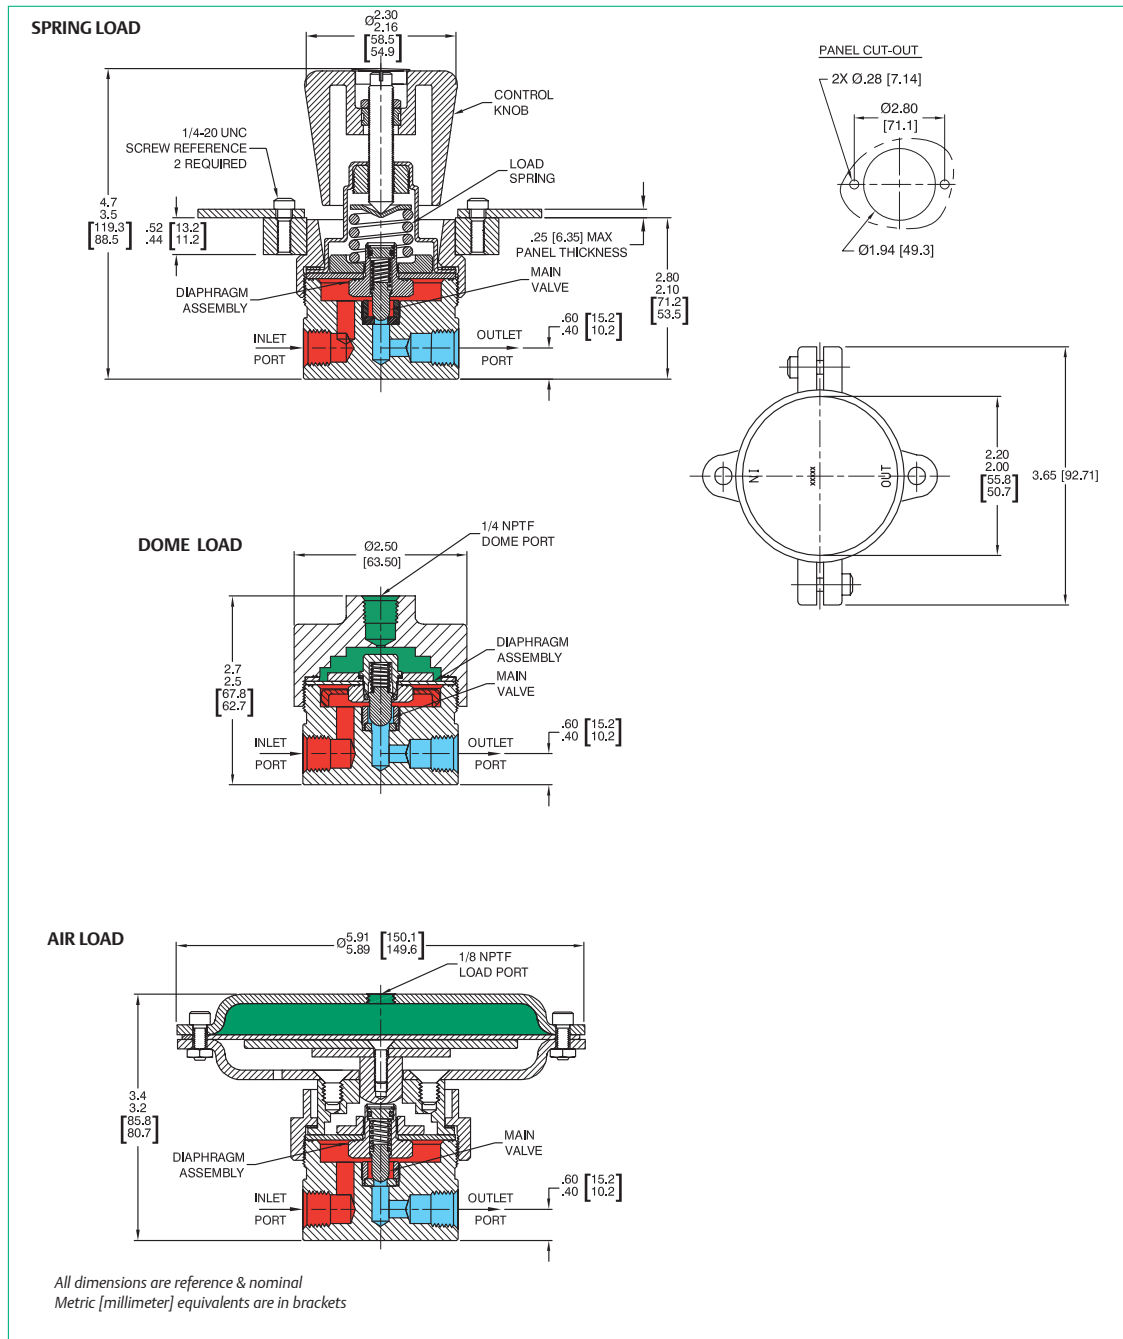




26-2300 SERIES


26-2300 Series Regulator Flow Charts

For more information on how to read flow curves, please refer to the Flow Curves and Calculations document (debul2007x012) in the TESCOM catalog or on www.tescom.com.

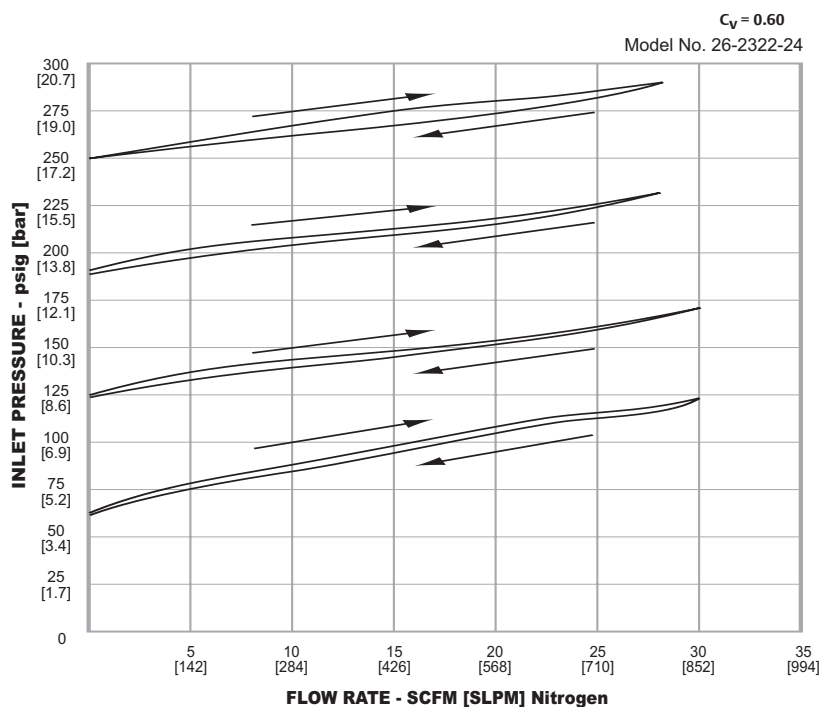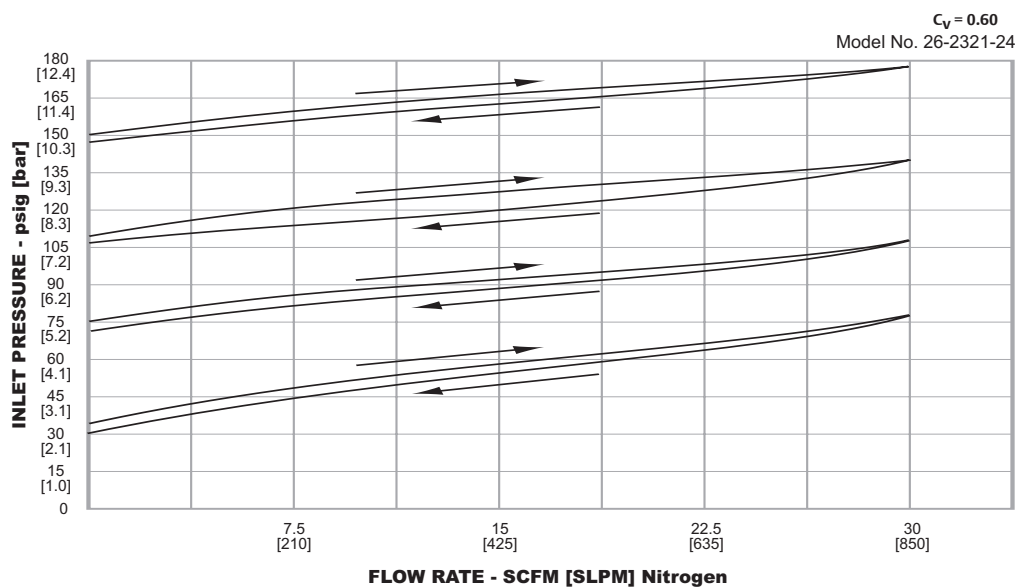

26-2300 SERIES

26-2300 Series Regulator Part Number Selector



Learn more about common options.
For modifications, repair kits and accessories, contact factory.

Example for selecting a part number:

| 26-23 | 2 | 1 | - | 2 | 4 |
|--------------|-------------------------|------------------------------|----------------------------|----------------------------|---|
| BASIC SERIES | BODY MATERIAL | CONTROL PRESSURE RANGE | INLET AND OUTLET PORT TYPE | INLET AND OUTLET PORT SIZE | |
| 26-23 | 2 – 303 Stainless Steel | 0 – 0-50 psig 0-3.4 bar | 1 – SAE | 4 – 1/4" | |
| | 3 – 2024-T351 Aluminum | 1 – 0-150 psig 0-10.3 bar | 2 – NPTF | 6 – 3/8" | |
| | 6 – 316 Stainless Steel | 2 – 0-250 psig 0-17.2 bar | 3 – MS33649 | 8 – 1/2" | |