



Proudly Distributed By

TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

Ultra-High Pressure Air Pump

ENERPAC
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ ATP-1500



ATP Series

Reservoir Capacity:
3,8 litres

Flow at Rated Pressure:
0,07 l/min

Maximum Operating Pressure:
1500 bar



Ultra-high pressure

This pump operates at ultra-high pressure, use only the specified fittings and hoses designed for these pressures.

Page: 59

- General purpose, high pressure air driven two speed pump unit for products requiring up to 1500 bar hydraulic pressure
- Compact, lightweight, rugged steel frame for protection and easy handling
- Prelubricated pump element, does not require an airline lubricator
- Easily adjustable output pressure control
- Integrated and protected easy to read glycerin filled gauge
- Safety relief valve limits output pressure.



Applications

The Enerpac ATP-Series air pump is ideally suited for use with hydraulic bolt tensing tools and hydraulic nuts.

Page: 56




ATEX Certified

The ATP-Pump is tested and certified according ATEX.


Ex II 2 GD ck T4

Page: 72

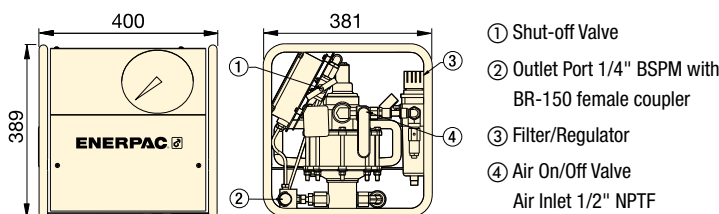

OIL FLOW VERSUS PRESSURE

Flow (l/min) at 6,2 bar air input

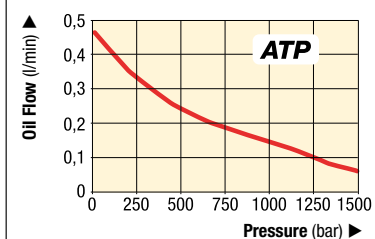

1500 bar HIGH PRESSURE AIR PUMP

Pump Type	Useable Oil Capacity (litres)	Pressure Rating (bar)	Model Number	Output Flow Rate at 0 bar (l/min)	Output Flow Rate at 1500 bar (l/min)	Air Pressure Range (bar)	Air Consumption (l/min)	Sound Level (dBA)	Weight (kg)
Two speed	3,8	1500	ATP-1500	0,43	0,07	5,5 - 6,2	594	70	32