



Proudly Distributed By

TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

LW-Series, Vertical Lifting Wedge

ENERPAC
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ Shown: LWC16, LW16 with SB2 and optional LWB1



- Minimized access gap for greater accessibility on applications with limited insertion space
- Secure, stable lifting and lowering motion with no slippage
- Single-acting spring return cylinder allows for automatic, mechanical retraction
- Integrated hand pump offers greater maneuverability (LWC16 only)
- Includes safety block SB2

LW Series

Minimum Clearance:
0.39 inches

Maximum Lift Height:
2.02*-2.72* inches

Maximum Force:
16 tons

Maximum Operating Pressure:
10,000 psi

* Using LWB1



Best Match Manual Pump

To power your Enerpac LW16 Lifting Wedge, the Enerpac P-392 Hand Pump or P-392FP Foot Pump is an ideal choice.

Page: 192




Split-Flow Manifolds

Split Flow Valves to control two or four lifting wedges simultaneously (LW16 only).

AM-21 with 3 ports 3/8" NPTF.
AM-41 with 5 ports 3/8" NPTF.

Page: 136

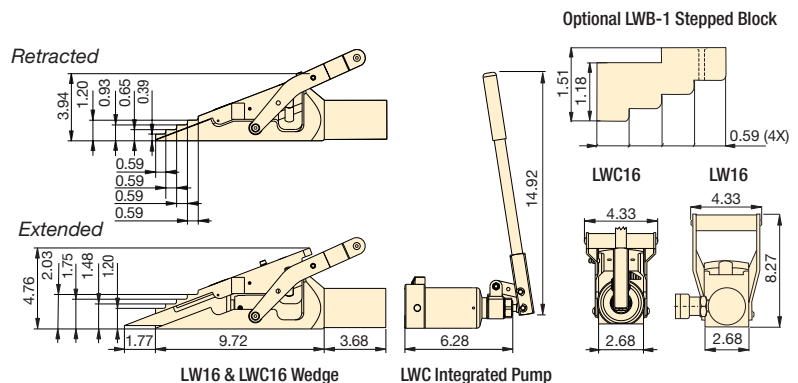

▼ The LW-Series is the ideal solution for lifting heavy equipment with minimum floor clearance.



Max. Lifting Force (ton)	Model No.	Minimum Clearance Gap (in)	Max. Lift per Stage (in)	Max. Lifting Height (in)	Max. Lifting Height Using Stepped Block (in)	Oil Capacity (in ³)	Wt. (lbs)	Pump Power Source
16	LW16*	0.39	0.83	2.02	2.72	4.75	15.4	External
	LWC16**						22.0	Integrated

* Includes SB2

** Includes SB2, LWB1, and carrying case