


R1241D



TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

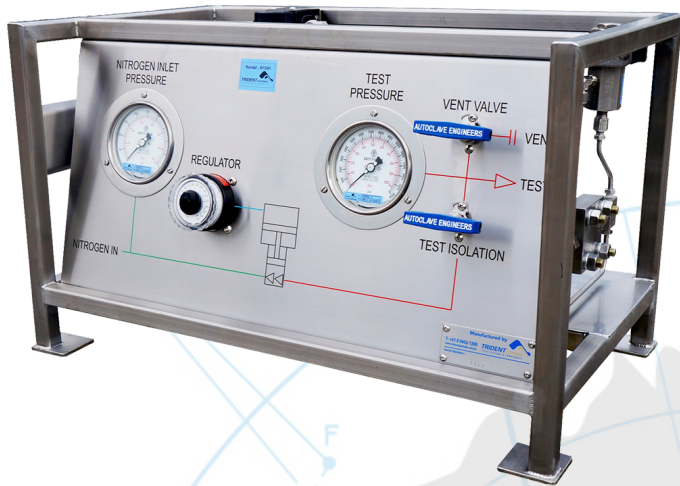

Two Stage Acting Gas Booster


Trident Australia GBT-30/75 two stage acting booster with air regulator and air isolation valve built into a 316SS frame.

Unit Dimensions: 700 x 380 x 400 mm
Weight: 40kgs

Options: Available separately or as a package with all hoses and fittings as required.

Specifications

Pump Manufacturer:	SC Hydraulic
Pump Pressure Ratio:	75:1
Max Pump Pressure:	0 - 15,000 psi
Liquid Gauge Range:	0 - 15,000 psi
Relief Valve Set Pressure:	TBA by customer
Air Drive Seals:	Buna N
Hydraulic Seals:	Buna N
Displacement/Stroke:	50.8ml
Min Gas Inlet Pressure:	100 psi
Max Rated Gas Supply:	1,740 psi
Air Inlet Connection:	1/2 inch NPT female
Gas Outlet Connection:	1/4 inch MP female
Gas Inlet Connection:	JIC 4 male

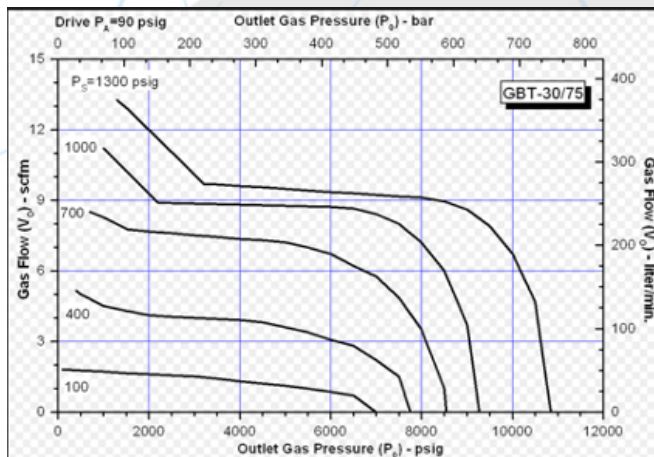

All of Trident Australia's rental equipment is checked and serviced before every rental job to ensure you get the best product and experience every time

WHAT YOU NEED.
WHEN YOU NEED IT.



15 Magnet Road,
Canning Vale WA 6155 | Australia
+61 8 9456 1300 phone
www.tridentaustralia.com.au