


R1642



TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

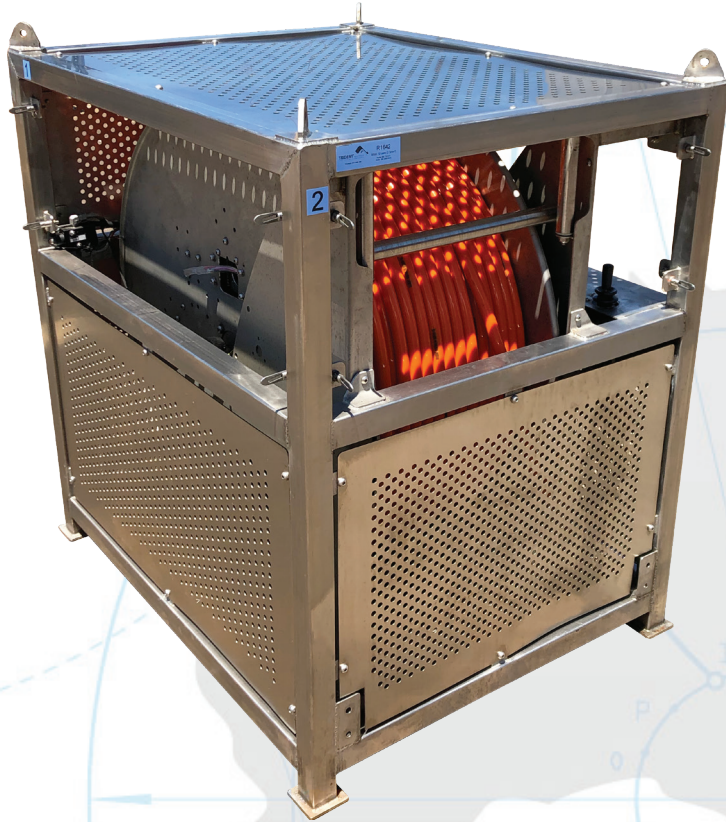

Electric Down Line

Trident Australia pneumatic driven electric down line reeler. Enclosed in a 316 Stainless Steel frame including guard panels and safety interlock switch to prevent operation with deck jumper attached. Includes a Pay In/Out controller mounted in the frame. Unit can be provided with appropriate accessories such as sheave wheel for protecting MBR's.

Reeler Specifications

Power: Air

Air Connection: 1" Minsup

Dimensions:

- Topside Connection: To customer's specifications
- Current: Trolex TX3700.SS.13.21.31.48
- Subsea Connection: To customer's specifications
- Current: 2 off Tronic BDIV-10-A001-BQ-G10-MC04S

Max Cable Length: 300m with 12 core.

All of Trident Australia's rental equipment is checked and serviced before every rental job to ensure you get the best product and experience every time

WHAT YOU NEED.
WHEN YOU NEED IT.



15 Magnet Road,
Canning Vale WA 6155 | Australia
+61 8 9456 1300 phone
www.tridentaustralia.com.au