

# R1878



## TRIDENT AUSTRALIA

FLUID SYSTEMS & COMPONENTS



### Trident Australia Hydrostatic Trolley Unit

Trident Australia's 1101 Series Hydro Test System, stainless steel trolley frame for portability with pump and chart recorder incorporated in one simple unit for your pressure testing needs.

- Autoclave Engineers ASL60-02 Air Driven Pump
- 15,000 psi 4 inch McDaniel Controls stainless steel gauge
- 15,000 psi De Wit paper chart recorder
- Auxiliary outlet with isolation valve

### Unit Specifications


Liquid Gauge Range: 0 - 15,000 psi  
Relief Valve Set Pressure: 15,000 psi - this can be adjusted to suit customer requirements  
Air Inlet: 1/2 inch NPT female  
Liquid Outlet: 3/8 inch AE medium pressure female  
Liquid Inlet: 1/2 inch NPT female

Unit Dimensions: 800 mm x 450 mm x 650 mm  
Tool Weight: 45 kgs

### Pump Specifications

Pump Manufacturer: Parker Autoclave Engineers  
Pump Pressure Range: 0 - 20,000 psi  
Pump Ratio: 1:140  
Pump Displacement/Cycle: 13.8 ml  
Air/Hydraulic Seals: Buna N

Options: Available as a package with all hoses and fittings as required

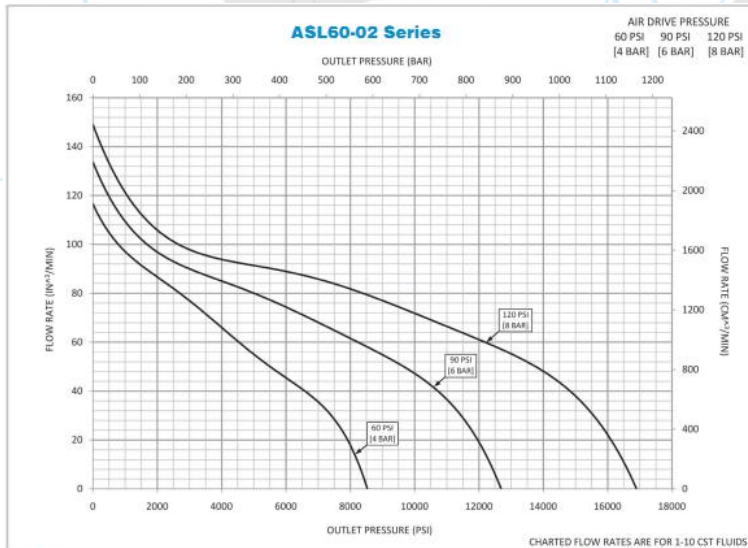

Actual flow rates will vary depending on air flow capacity, downstream flow restrictions, and fluid type.

All of Trident Australia's rental equipment is checked and serviced before every rental job to ensure you get the best product and experience every time

WHAT YOU NEED.  
WHEN YOU NEED IT.



FS 603850



15 Magnet Road,  
Canning Vale WA 6155 | Australia  
+61 8 9456 1300 phone  
www.tridentaustralia.com.au