



### **OPERATION**

The Ruelco Vent Screen is manufactured with an all stainless steel construction and is used to prevent debris or insects from blocking the vent port of pneumatic valves. The Ruelco vent screen is available in four standard NPT sizes.






#### DIMENSION

NPT SIZE	А	В	С
1/8"	.550" (13.97 mm)	.435" (11.05 mm)	.187" (4.75 mm)
1/4"	.770" (19.56 mm)	.563" (14.30 mm)	.281" (7.14 mm)
3/8"	.860"(21.84 mm)	.745" (18.92 mm)	.375" (9.53 mm)
1/2"	1.10" (27.984 mm)	.875" (22.23 mm)	.438" (11.12 mm)

# **ORDERING**

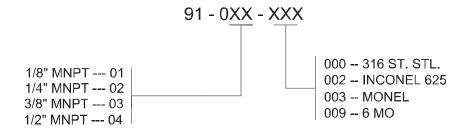


PHONE: 504-340-0055 FAX: 504-340-0056 EMAIL: SALES@RUELCO.COM


1209 DISTRIBUTORS ROW NEW ORLEANS, LA 70123



#### **OPERATION**

The Ruelco Large Vent Screen is a three part assembly manufactured with an all stainless steel construction and is used to prevent debris or insects from blocking the vent port of pneumatic valves. These vent screens can withstand pressures up to 200 psi while still providing the necessary flow rates required to quickly shut down large pneumatic actuator valves.





## **DIMENSION**

NPT SIZE	А	В	MAXIMUM FLOW RATE
1"	2.00" (50.8 mm)	1.50" (38.1 mm)	3.6 SCFM
1-1/2"	2.74" (69.6 mm)	2.125" (53.9 mm)	10.4 SCFM
2"	2.74" (69.6 mm)	2.44" (61.9 mm)	16.5 SCFM

## **ORDERING CODE**

PHONE: 504-340-0055 FAX: 504-340-0056 EMAIL: SALES@RUELCO.COM

1209 DISTRIBUTORS ROW NEW ORLEANS, LA 70123