



Proudly Distributed By

**TRIDENT AUSTRALIA**  
FLUID SYSTEMS & COMPONENTS

## Hydraulic Machine Lifts

▼ SOH-10-6



- For lifting heavy equipment with minimum available access
- Remote hydraulic pump enhances safety
- Low height lifting toe
- Precision guided to reduce friction and isolate cylinder from side-loads
- Two extendable support feet provide extra stability
- Includes RC-Series DUO Cylinder with CR-400 coupler.

### SOH Series

Lifting Capacity:  
**8,5 - 20 ton**

Stroke:  
**136 - 157 mm**

Toe Clearance:  
**20 mm**

Maximum Operating Pressure:  
**700 bar**



#### RSM-Series Flat-Jac®

Low height, single acting spring-return cylinders are ideal for space restricted applications.

Page: 22




#### Load Skates

In combination with the Enerpac Machine Lifts we recommend Load Skates for moving heavy loads.

Page: 174

▼ Limited access under this machine makes the Enerpac hydraulic machine lift the perfect solution.

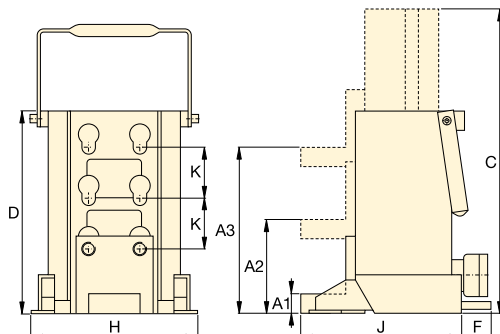

Capacity ton (kN)	Toe Clearance (mm)			Stroke (mm)	Model Number	Oil Capacity (cm <sup>3</sup> )	Dimensions (mm)				⚖️ (kg)		
	Minimum A1	Central A2	Maximum A3				Total Ext. Height C	Total Body Height D	F	H		J	K
8,5 (75)	20	95	169	136	SOH-10-6	224	430	294	-	190	214	74	26
20 (178)	30	110	190	157	SOH-23-6	525	472	320	65	265	250	80	45

www.enerpac.com

**ENERPAC** 173