

## ZA4T-Series, Air Driven Torque Pumps

**ENERPAC**   
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ ZA4204TX-ER



- Two-speed operation and high by-pass pressure reduces cycle time for improved productivity
- Glycerin filled pressure gauge with transparent overlays in Nm and Ft.lbs for Enerpac torque wrenches provide a quick torque reference
- Standard Regulator-Filter-Lubricator with removable bowls and auto drain
- Heat exchanger warms exhaust air to prevent freezing and cools the oil
- Ergonomic pendant allows remote operation up to 6 m.

### Complete 700 bar Pump-Hose Set ZA4208TX-QRU105

- Fine air pressure adjustment for very accurate torque control
- Improved wrench performance at low pressure
- Standard with THQ706T twin hose.



**Z** Tough,  
Dependable  
Innovative  
**CLASS**



### Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

For 700 bar	Model Nr.
6 m long, 2 hoses	THQ-706T
12 m long, 2 hoses	THQ-712T
For 800 bar	
6 m long, 2 hoses	THC-7062
12 m long, 2 hoses	THC-7122



### Gauge and Overlay Kit

Available separately for use with ZA4T-Series pumps: **GT-4015Q** includes gauge and overlays for all S- and W-Series wrenches.

**GT-4015** includes gauge and overlays for all SQD and HXD-Series wrenches.



### Torque Wrench Pump Selection

For optimum speed and performance see the torque wrench pump and hose selection matrix.

Page: 40

◀ Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.



# Air Driven Torque Wrench Pumps



### Pump Applications

The ZA4T-Series pump is best suited to power medium to large size torque wrenches.

Patent-pending Z-Class technology provides high by-pass pressures for increased productivity. Its high power to weight ratio and compact design make it ideal for applications which require easy transport of the pump.

All ZA4T-Series pump models meet CE, CSA and TÜV safety requirements. For further application assistance contact your local Enerpac office.

### ATEX 95 Certified

The ZA4T-Series pumps are tested and certified according to the Equipment Directive 94 / 9 / EC "ATEX Directive".

The explosion protection is for equipment group II, equipment category 2 (hazardous area zone 1), in gas and/or dust atmospheres. The ZA4T-Series pumps are marked with: Ex II 2 GD ck T4.



## ZA4T Series



Reservoir Capacity:

**4,0 - 8,0 litres**

Flow at Rated Pressure:


**0,8 - 1,0 l/min**

Air Consumption:

**600 - 2840 l/min**

Maximum Operating Pressure:

**700 - 800 bar**

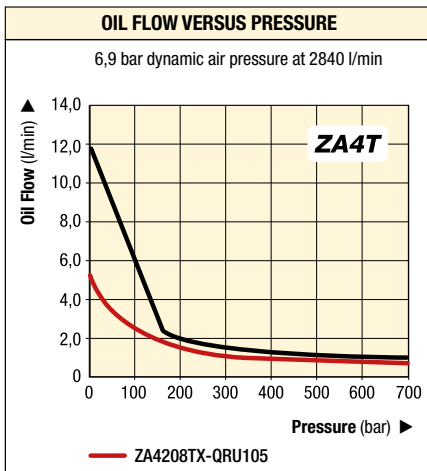

### Accessory Options

Available by placing the following additional suffix at the end of the model number:

- K** = Skid bar
- M** = 4-wrench manifold
- R** = Roll cage

Page: 53

▼ ZA4208TX-QRU105 for improved wrench performance and torque control at low pressure.



### COMMON PUMP MODELS

For Use With Torque Wrenches	Maximum Operating Pressure (bar)	Model Number	By-Pass Pressure (bar)	Usable Oil Capacity (litres)	Weight (kg)
All S and W-Series	700	ZA4208TX-QRU105 *	200	6,6	58
	700	ZA4204TX-Q	140	2,7	42
	700	ZA4208TX-Q	140	6,6	47
	700	ZA4204TX-QR	140	2,7	46
	700	ZA4208TX-QR	140	6,6	51
All SQD and HXD-Series	800	ZA4204TX-E	140	2,7	42
	800	ZA4208TX-E	140	6,6	47
	800	ZA4204TX-ER	140	2,7	46
	800	ZA4208TX-ER	140	6,6	51

\* Standard with THQ706T hose and fine air pressure adjustment for very accurate torque control. Pump weight 45 kg, set weight 58 kg.



Proudly Distributed By

**TRIDENT AUSTRALIA**  
FLUID SYSTEMS & COMPONENTS

## ZA4T-Series, Ordering Matrix and Specifications

**ENERPAC**  
POWERFUL SOLUTIONS. GLOBAL FORCE.

▼ This is how a ZA4T-Series pump model number is built up:

<b>Z</b>	<b>A</b>	<b>4</b>	<b>2</b>	<b>08</b>	<b>T</b>	<b>X</b>	<b>-</b>	<b>Q</b>	<b>M</b>	<b>R</b>
1	2	3	4	5	6	7	8	8	8	8
Product Type	Motor Type	Flow Group	Valve Type	Reservoir Size	Valve Operation	Voltage	Must be E or Q	Options	Options	Options

### 1 Product Type

Z = Pump series

### 2 Motor Type

A = Air motor

### 3 Flow Group

4 = 1,0 l/min @ 700 bar

### 4 Valve Type

2 = Torque Wrench Valve

### 5 Reservoir Size

04 = 2,7 litres useable oil

08 = 6,6 litres useable oil

### 6 Valve Operation

T = Air operated valve with pendant

### 7 Voltage

X = Not applicable

### 8 Options

E = with 800 bar couplers for use with HXD and SQD-Series or other wrenches

Q = with 700 bar couplers for use with S and W-Series or other wrenches

K = Skid bar

M = 4-wrench manifold

R = Roll cage



### How to order your ZA4T-Series torque wrench pump

Model No. ZA4208TX-QMR

700 bar pump for use with Enerpac S- and W-Series and other 700 bar hydraulic torque wrenches, 8 litres reservoir, 4-wrench manifold, and roll cage.


Refer to the selection matrix for optimum wrench, pump and hose combinations.



### Torque Wrench Hoses

Use Enerpac twin safety hoses to connect your torque wrench to the pump.

For 700 bar	Model Nr.
6 m long, 2 hoses	THQ-706T
12 m long, 2 hoses	THQ-712T
For 800 bar	
6 m long, 2 hoses	THC-7062
12 m long, 2 hoses	THC-7122

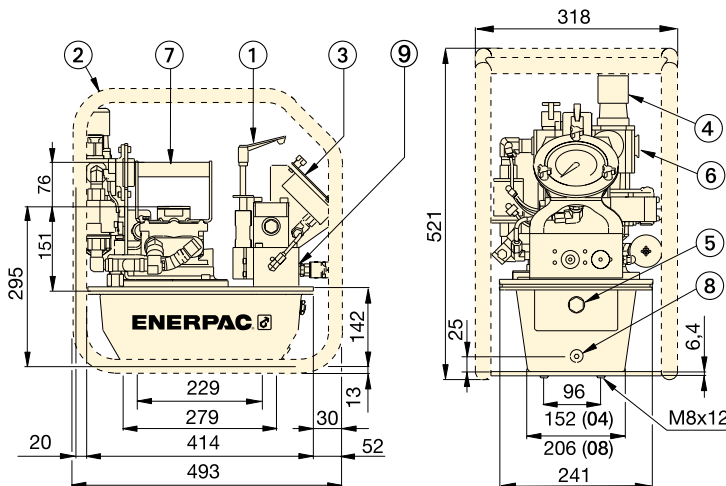

- ① User adjustable relief valve
- ② Roll Cage (optional)
- ③ Gauge with overlays
- ④ Filter/lubricator/regulator
- ⑤ Oil level sight gauge
- ⑥ Air input 1/2" NPTF
- ⑦ Standard handle
- ⑧ Oil drain
- ⑨ 1/4"-18 NPTF Oil outlet

ZA4T-Series Performance							
Output Flow Rate (l/min)				Dynamic Air Pressure Range (bar)	Air Consumption (l/min)	Sound Level (dBA)	Relief Valve Adjustment Range (bar)
7 bar	50 bar	350 bar	700 bar				
11,5	8,8	1,2	1,0	4,0 - 6,9	600 - 2840	85-90	124-700 *
5,4 **	4,8 **	1,1 **	0,8 **	7,0 **			

\* Pump type (-Q) shown, (-E) range is 124-800 bar.

\*\* ZA4208TX-QRU105 only.

▼ Most hydraulic torque wrenches can be powered by the Enerpac ZA4T-Series torque wrench pump.



## ZA4T-Series, Pump Options



**Skid Bar**

- Provides greater pump stability on soft or uneven surfaces
- Provides easy two-handed lift.



**4-Wrench Manifold**

- For simultaneous operation of multiple torque wrenches
- Can be factory installed or ordered separately.



**ZA4T Series**

- Reservoir Capacity:  
**4,0 - 8,0 litres**
- Flow at Rated Pressure:  
**0,8 - 1,0 l/min**
- Air Consumption:  
**600 - 2840 l/min**
- Maximum Operating Pressure:  
**700 - 800 bar**

Accessory Kit * Model Nr.	Can be used on ZA4T-Series torque wrench pumps
<b>SBZ-4</b>	04 and 08 reservoir

\* Add suffix **K** for factory installation.  
Weight skid bar 2,2 kg.  
Ordering Example: **ZA4208TX-QK**

Accessory Kit * Model Nr.	Can be used on ZA4T-Series torque wrench pumps
<b>ZTM-E</b>	for 800 bar wrenches
<b>ZTM-Q</b>	for 700 bar wrenches

\* Add suffix **M** for factory installation.  
Weight manifold 4,5 kg.  
Ordering Example: **ZA4208TX-QM**



**700 bar Spin-on Couplers**

Model-Nr: TH-630 male coupler  
TR-630 female coupler

- Mounted on:
  - Torque wrench pumps with suffix "Q"
  - S and W-Series wrenches
  - THQ-Series hoses
  - 4-Wrench manifold ZTM-Q.



**800 bar Lock-ring Couplers**

Model-Nr: CMF-250 male coupler  
CFF-250 female coupler

- Mounted on:
  - Torque wrench pumps with suffix "E"
  - HXD and SQD-Series wrenches
  - THC-Series hoses
  - 4-Wrench manifold ZTM-E.



**Roll Cage**

- Protects pump
- Provides greater pump stability

Accessory Kit * Model Nr.	Can be used on ZA4T-Series torque wrench pumps
<b>ZRC-04</b>	04 and 08 reservoir

\* Add suffix **R** for factory installation.  
Roll cage weight 3,4 kg.  
Ordering Example: **ZA4208TX-QR**