




Proudly Distributed By

TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS



Pneumatic Diaphragm Pump

P25BY - 1" / 25mm Ball Valve

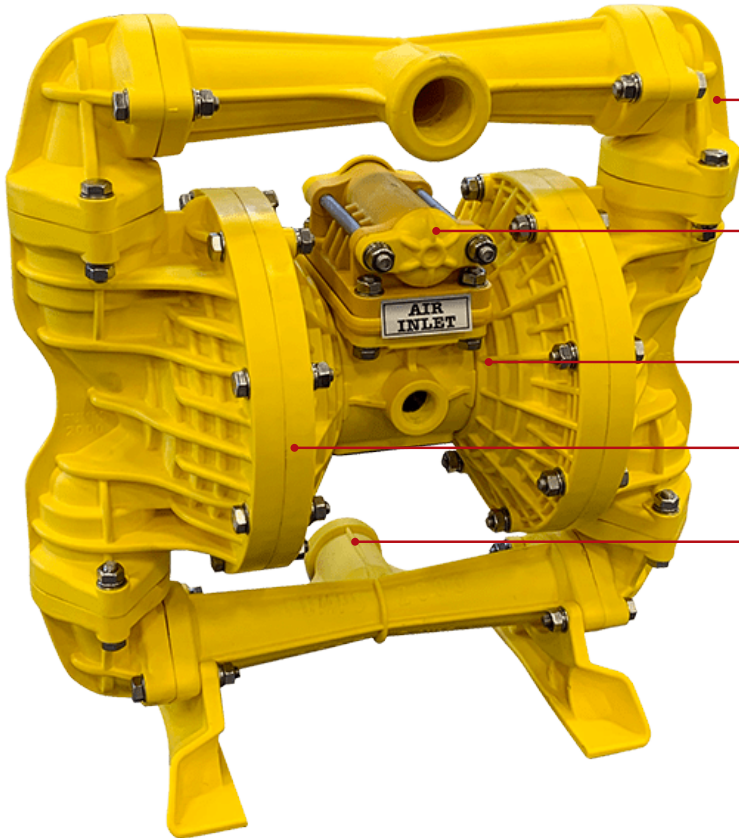

Self-Cleaning Ball Valve

Lubrication Free Air Motor

Unique Main Seal Eliminates Shaft Replacement

Longer Life Diaphragm

Pass 5/16" / 8mm Solids

Yellow Series
General Purpose
Nylon Body – Hytrel Elastomers
ATEX M2 Rating

Other materials are available to suit your specific application



Red Series - P25BR
FRAS (Fire Retardant Antistatic) Nylon Body- Hytrel Elastomers- For Explosive Environment- ATEX M1 Rating



Blue Series - P25BB
Polypropylene Body- Santoprene Elastomers- For Acids, Caustics, Chemicals- ATEX M2 Rating



Ebony Series - P25BE
Noryl Body- Corrosive Resistant Internals- For Acids And Other Hazardous Liquids, ATEX M2 Rating

Features

- > Patented design components
- > Simple design with fewer wear parts
- > Large particle handling
- > Low air consumption
- > Lightweight
- > Rugged & impact resistant
- > Lubrication free
- > No end of life – can always be repaired
- > ATEX M1 and M2 certified
- > Low noise levels

Benefits

- > Increased productivity
- > Reduced costs – pays for itself
- > Increased reliability & longer life
- > Less downtime & maintenance
- > Easier to diagnose & repair
- > Save on energy costs – more air available for other equipment
- > Fewer injuries
- > No pollutants (oil free)
- > Safe for hazardous environments



Proudly Distributed By

TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

Pumps 2000 Pneumatic Diaphragm Pump


P25BY - 1" / 25mm Ball Valve



Ball Valve

"Pumps 2000" pneumatic diaphragm pumps were specifically designed for harsh mining duties to outperform and outlast the competition due to a number of patented design features. The light weight feature provides ease of mobility and reduces the risk of injury. Low air consumption and long lasting lubrication free parts means low cost running and reduced maintenance. ***Ideally suited for pumping applications in all industries.***

Performance Curve

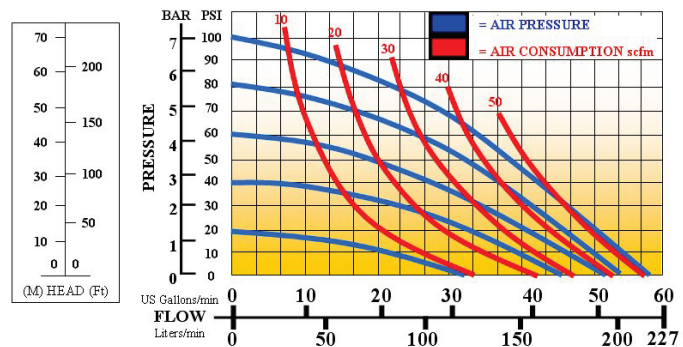

AIR PRESSURE: Tested at 100 psi / 690 kPa
(not to exceed 125 psi / 861 kPa)

FLOW RATE: 0-58 gpm / 220 Lpm

FLUID CONNECTION: 1" / 25mm (Internal Thread)

AIR INLET PORT: 1/2" / 15mm (Internal Thread)

EXHAUST PORT: 3/4" / 19mm (Internal Thread)

DELIVERY PRESSURE: Tested to 87 psi / 600 kPa

SUCTION LIFT: Tested to 19' / 6m dry and 31' / 9m wet

SOLIDS HANDLING: .31" / 8mm

PUMP WEIGHT: Yellow Series – 18lbs / 8.2kg
Red (FRAS) Series – 21lbs / 9.1kg
Blue Series – 15lbs / 6.8kg

Pumps 2000 (International)
6-12 Burleigh Street
Toronto 2283
N.S.W., Australia
Tel: +61 2 49599400
Fax: +61 2 49504927
info@pumps2000.com

Pumps 2000 (America)
1721 Main Street
Pittsburgh, PA 15215
Tel: 412.963.9200
1.800.245.6211
Fax: 412.963.9214
info@pumps2000america.com

Pumps 2000 (Europe)
Sunderland
Tyne & Wear, SR1 2NQ
United Kingdom
Tel: +44 (0) 191 5675488
Fax: +44 (0) 191 5678512
info@pumps2000europe.com



www.pumps2000.com | www.pumps2000america.com | www.pumps2000europe.com

Ph: +61 8 9456 1300

Web: www.tridentaustralia.com.au

Email: sales@tridentaustralia.com.au