


R1748



TRIDENT AUSTRALIA
FLUID SYSTEMS & COMPONENTS

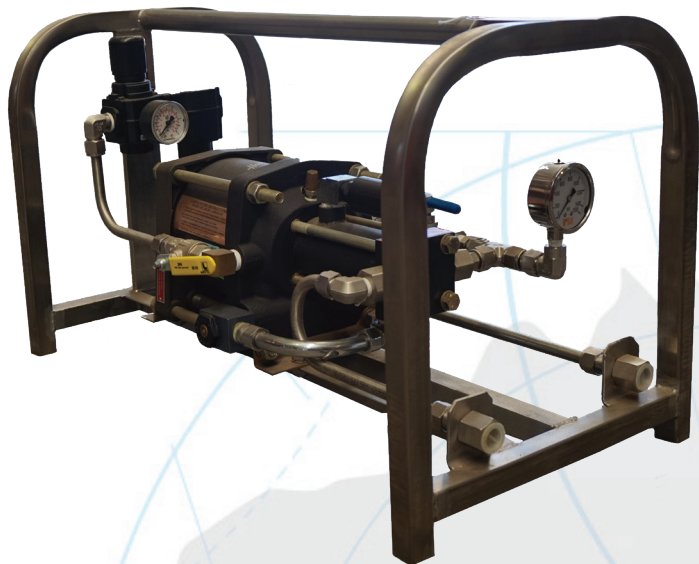

Single Stage Single acting Gas Booster

Trident Australia's AG-7 single stage single acting booster with air regulator & air isolation valve built into a 316SS frame.

Rental Number: R1748

Unit Specifications

Pump Manufacturer: Haskel
Pump Pressure Ratio: 7:1
Maximum Pump Pressure: 0-1,050 psi
Gauge Range: 0-1,050 psi
Relief Valve Set Pressure: TBA by customer
Air Drive Seals: Buna N
Hydraulic Seals: Buna N
Displacement / Stroke: 216 ml
Min. Gas Inlet Pressure: 100 psi
Max. Rated Gas Supply: 1,050 psi
Air Inlet Connection: 1/2" NPT Female
Gas Outlet Connection: 3/4" NPT Female
Gas Inlet Connection: 3/4" NPT Female

Options

Available separately or as a package with all hoses and fitting as required.

Unit Dimensions: TBA

Weight: TBA

All of Trident Australia's rental equipment is checked and serviced before every rental job to ensure you get the best product and experience every time

WHAT YOU NEED.
WHEN YOU NEED IT.



15 Magnet Road,
Canning Vale WA 6155 | Australia
+61 8 9456 1300 phone
www.tridentaustralia.com.au